


Storage Developer Conference September 22-23, 2020

Improve
Distributed Storage System
Total Cost of Ownership with
Host-Managed SMR HDDs

Albert Chen KALISTA IO

#### Introduction





Albert Chen

CEO of KALISTA IO. Previously, senior engineering and management roles at WDC, MSFT and various startups. Pioneered industry's HM-SMR storage solutions.

hselin@kalista.io

https://linkedin.com/in/alberthchen

# Preview: enabling HM-SMR everywhere

Apache Hadoop® Gitlab®

NGINX® Docker® registry

Ceph® Media servers


MongoDB® Minio®

Kubernetes® vols and more...

Preview: without friction

# No applications changes No kernel modifications Just works

#### Preview: consistent performance atscale

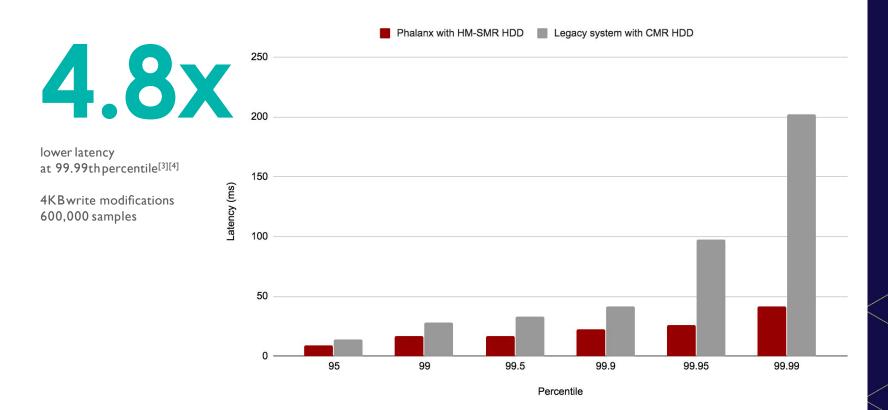

#### Agenda

SD@

**Trends** 

Problems and opportunities

Solutions


Host-Managed SMR

Current implementations and limitations

**Improvements** 

**KALISTA Phalanx** 

Performance and simplicity

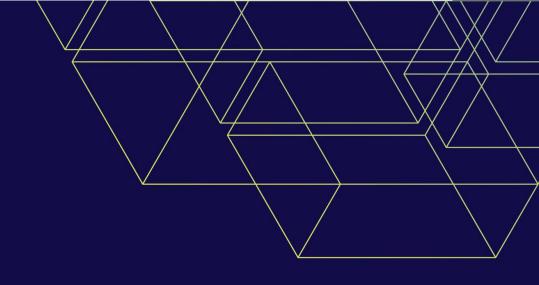

#### **Trends**


# Explosive growth of digital data



Amount of data created globally will increase from 32 zettabytes (ZB) last year to over 100 ZB by 2023<sup>[1]</sup>

# Falling cost (\$/GB)<sup>[2]</sup>



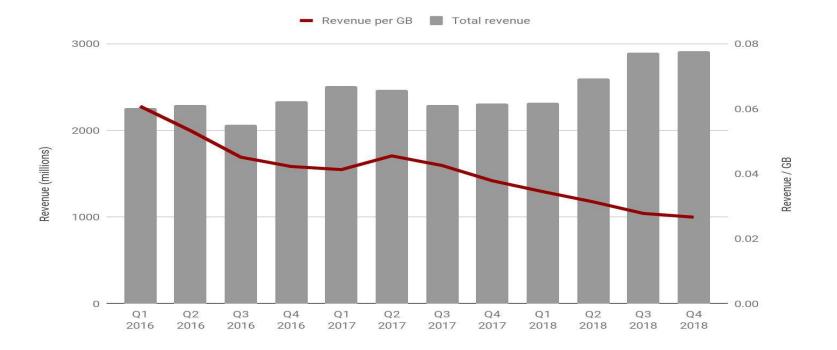

# Pushing the limits of device physics




Storage devices are becoming more complex, difficult and costly to use


#### New and expected usage models

vessels



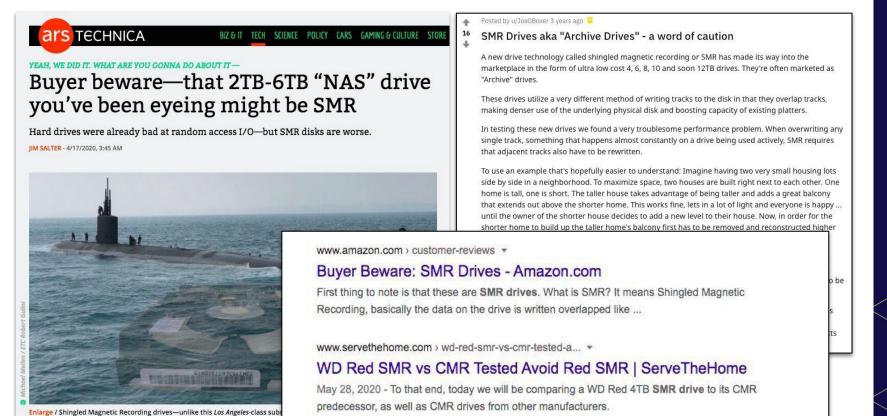


#### Increasing total capacity & device size<sup>[2]</sup>

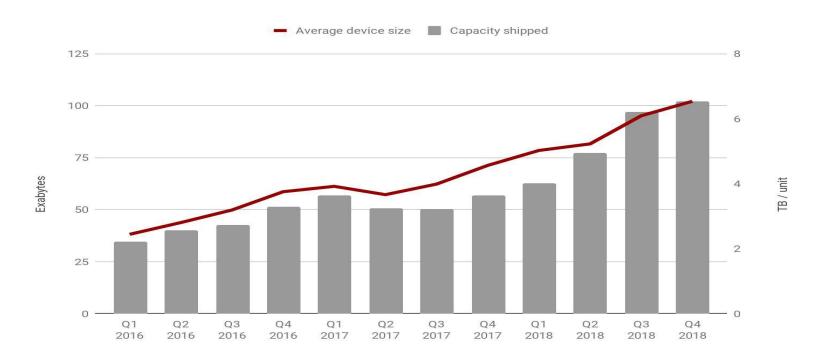


#### Declining 10 density



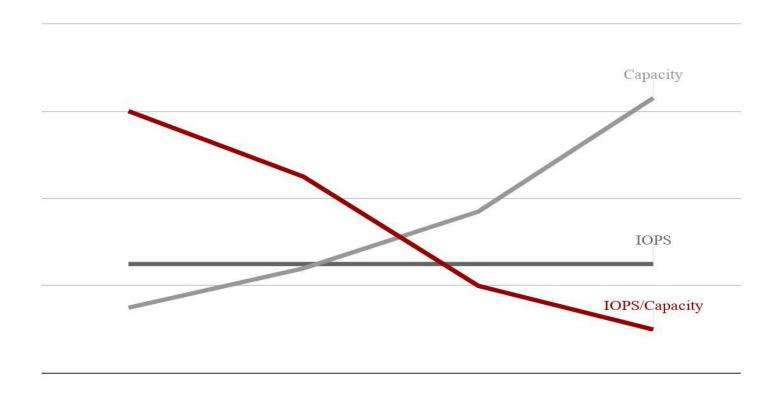

#### SD@


#### Limited margin for innovation<sup>[2]</sup>

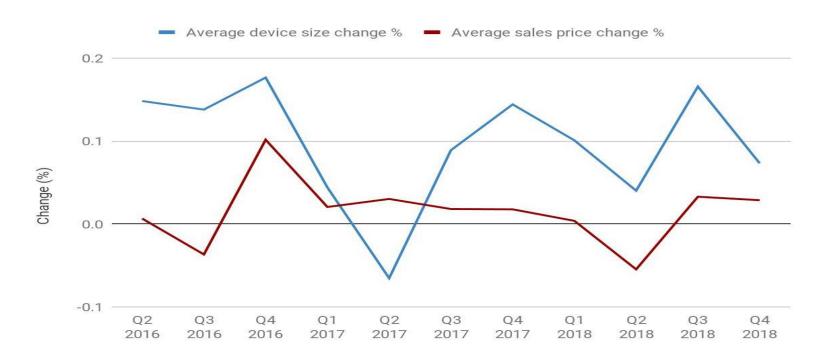

SD@

"Hard disk is the worst form of storage device, except for all the others."

Winston Leonard Spencer-Churchill

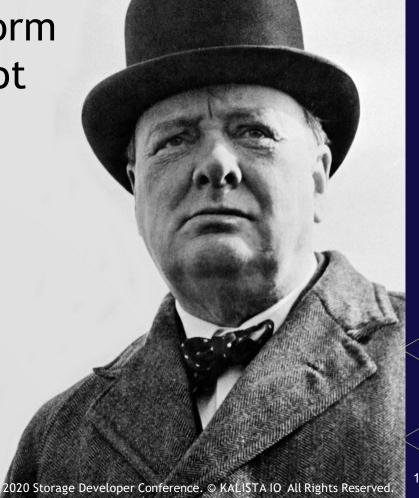


#### Demand for agility and optimal TCO



New architectures and usage models are growing increasingly incompatible & adverse for next generation storage technologies


#### 10 Blender



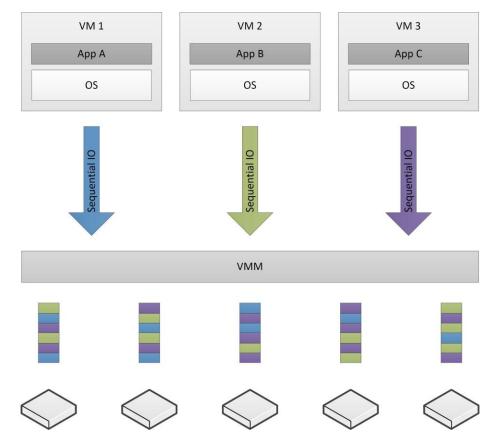

# Long taillatency



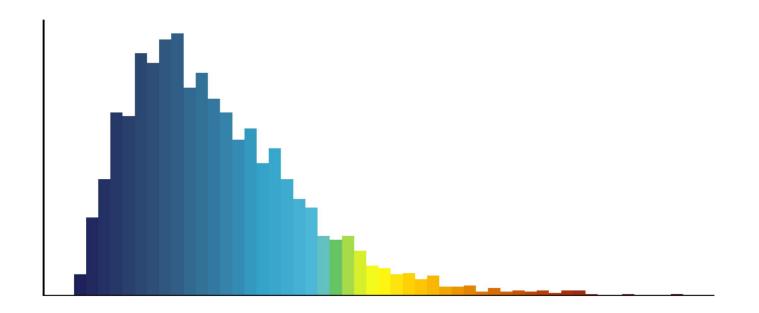


#### Total cost of ownership









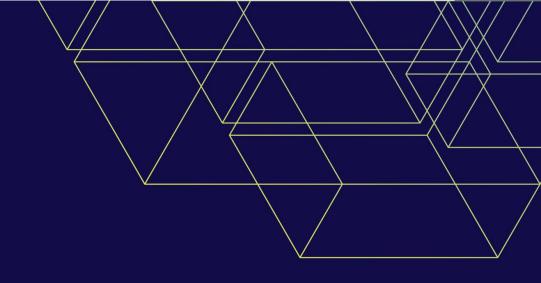

#### Host Managed SMR





Higher capacity

Reduced total cost of ownership

Consistent performance

More restrictive usage model

Investment in storage stack

#### Layers of indirection



**Application** Modified application **Application** File system SMR file system **Device** mapper Direct device access **HM-SMR HM-SMR HM-SMR** 

#### Available implementations





SG\_IO

Direct access

libzbc

Direct access library

f2fs

SMR capable file system


dm-zoned Device mapper target



"Wisdom begins in wonder." - Socrates

#### Make room for innovation



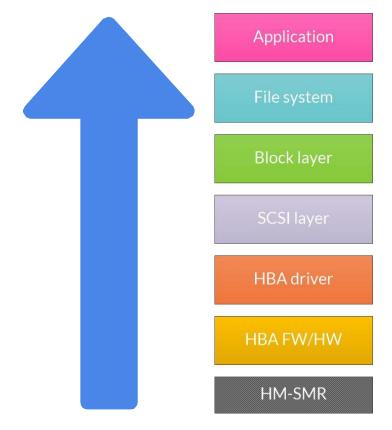


#### Improve user experience





#### Minimize dependency and limitations

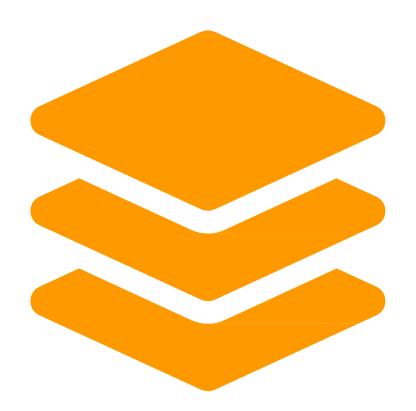


Kernel version

Modules/drivers

Hardware configuration

Protocol support

#### Leverage existing interfaces

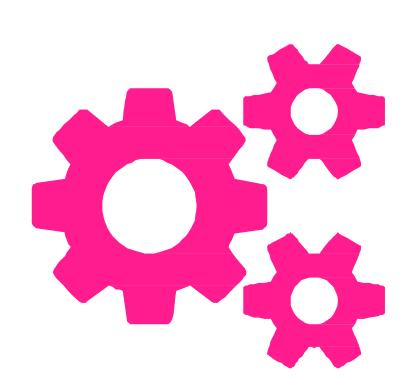

File API

open(), read(), write()...

Object API


GET, PUT, DELETE

**Block API** 

TUR, WRITE, READ

#### Work for alldevices



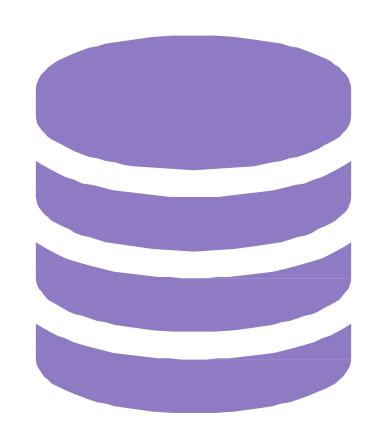

Conventional device

HDD


SSD

Zoned devices

HM/Hybrid-SMR HDD

ZNS SSD

#### Deploy anywhere at anytime

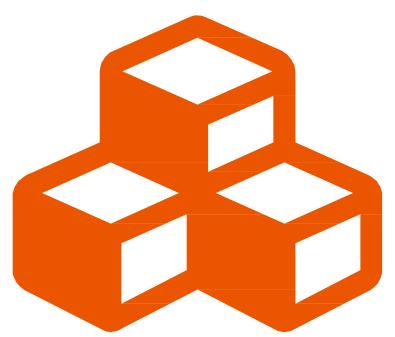

Minimal dependencies

Easy to add & remove capacity

Fits within existing workflows

Works with orchestration fwks

### Be device friendly





Minimize seeks


Maximize IO transfersize

Prevent hot spots

Reduce background work

#### Perform at scale



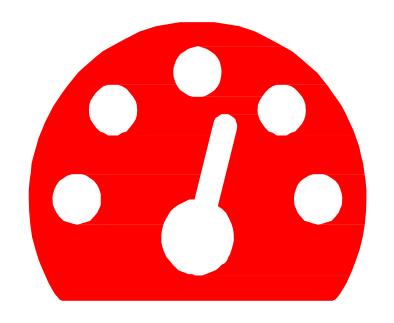

Reduce contention

Increase IO concurrency

**IO** prioritization

Trim tail latency

#### SD@

## Support new technologies



Multi-actuator

Variable capacity

Large block size


New usagemodels

# KALISTAIO


Get ready for a storage revolution



Adding performance and simplicity

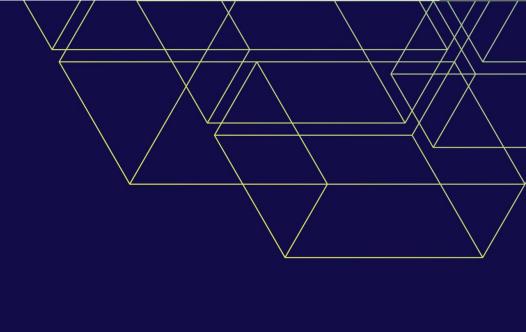


## Performance, simplicity and future ready

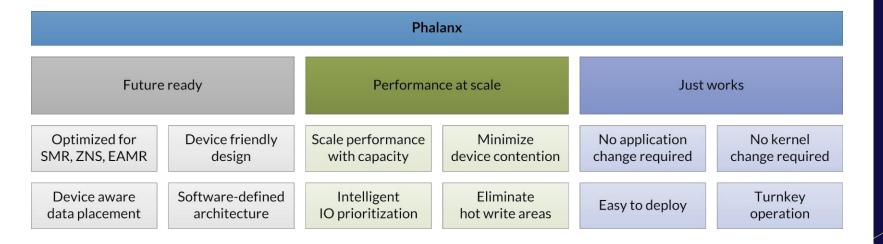



## Support existing interfaces & device types

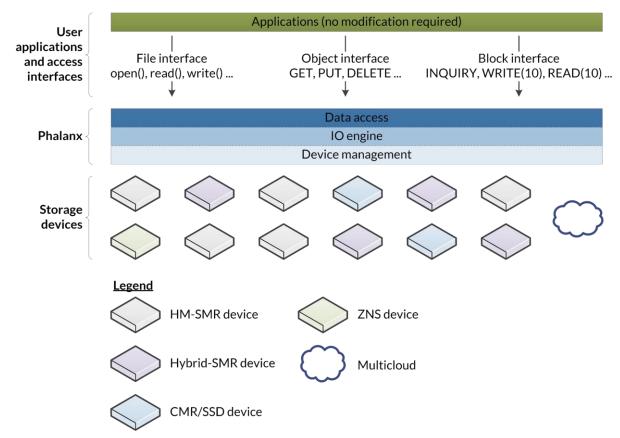

Reducing dependencies and adapting tovariations

## Engineered to minimize dependency

User space implementation

No kernelmodifications

No additional modules/drivers

Generalized for all kernel versions


#### Hardware

No zone configuration requirements

No device and zone size limitations


## Know yourdependencies



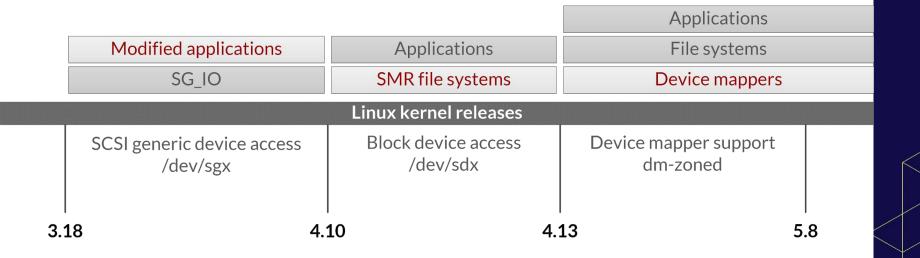


## Declare your independence



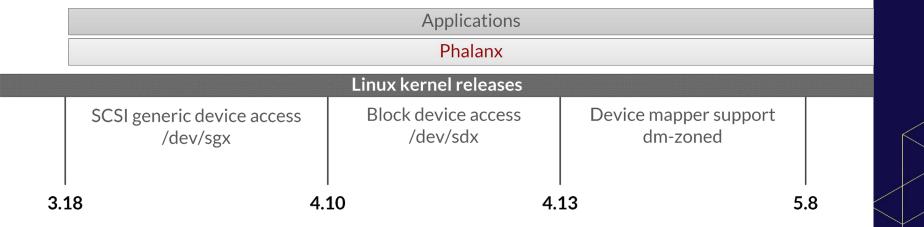



## Deploy anywhere. Run everywhere.

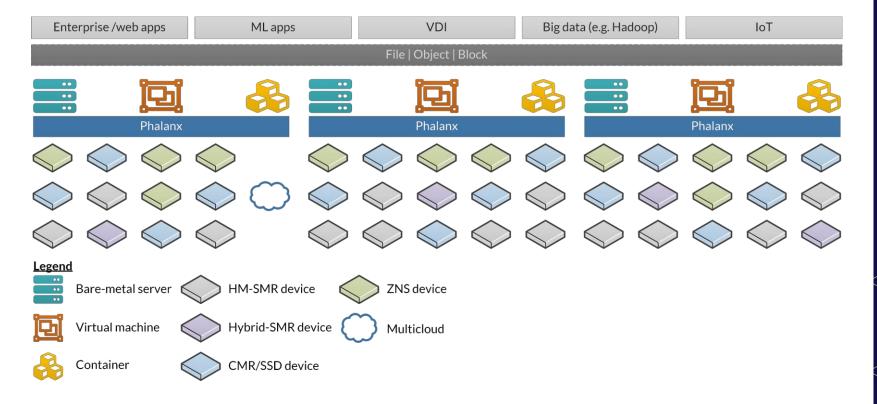

## Easy to deploy. Simple to operate.

 Download image docker pull kalistaio/phalanx:release


#### 2. And start container

```
docker run\
...
--mount type=bind,src=<mount path>. ..\
kalistaio/phalanx:release
...
-d <path to HM-SMR devices> \
```

What happens when you remove frictions and barriers to HM-SMR

## Distributed systems with HM-SMR



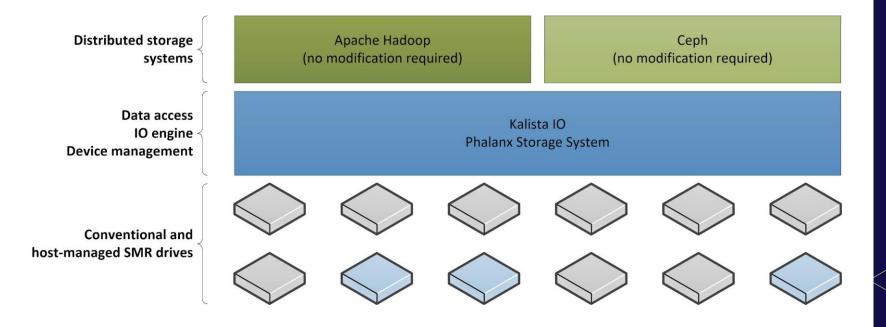

## And much more

**NGINX®** 

GitLab<sup>®</sup>

 $MongoDB^{\circledR}$ 

OpenStack Swift®


Docker® registry

Kubernetes® volumes

Minio®





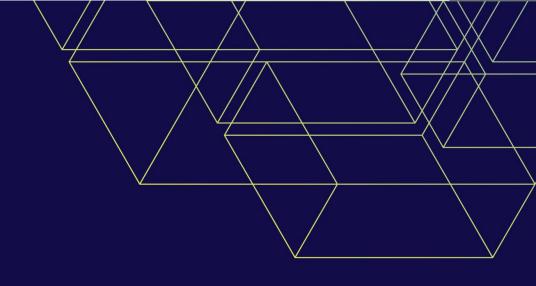

## Designed for performance and scalability

#### Minimize contention

Data/metadata separation

Log structured data layout

#### Maximize IO concurrency

Support multi-actuator disks

Distribute workload across devices

#### Generate device friendly behavior

Prevent hot spots

Minimize background work

Minimize seeks

#### Scale performance with capacity

Row and column architecture

## Minimize seeks and contention






LBA 0


## Distribute workload across devices



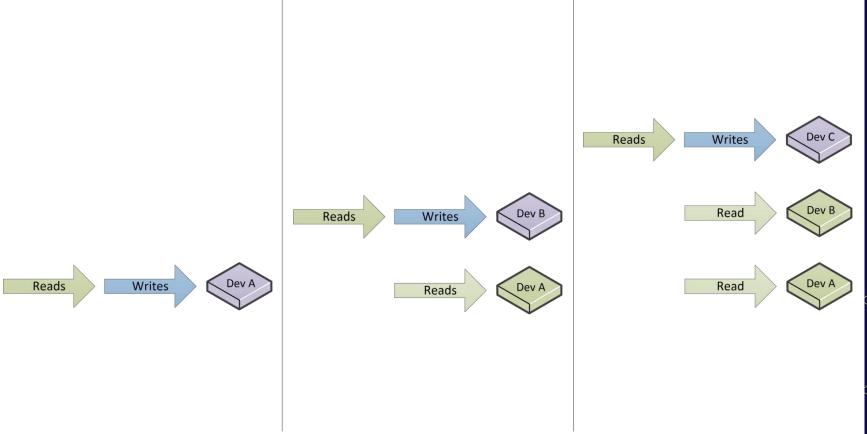


#### Decrease contention



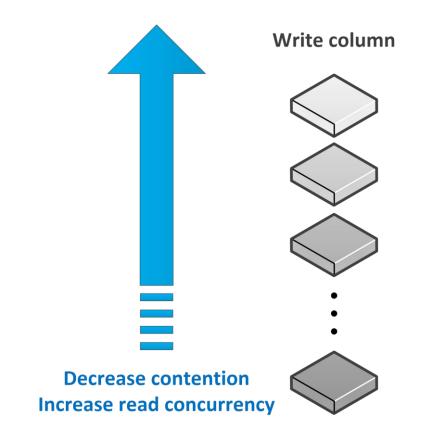

## Scale performance withcapacity

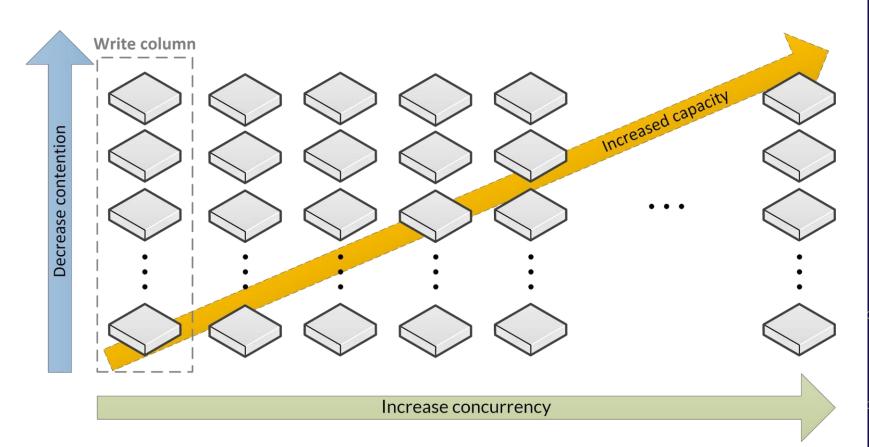

## Semantic intelligence





Prioritization

**Tiering** 


Caching

Predictive optimization

Quality of service (Qos)


What happens when you enable devices to perform at their best

## Write tail latencies with legacy system<sup>[3]</sup>

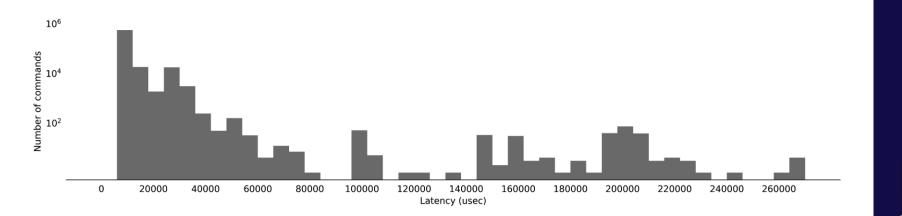

## Curtailed with Phalanx and HM-SMR<sup>[4]</sup>



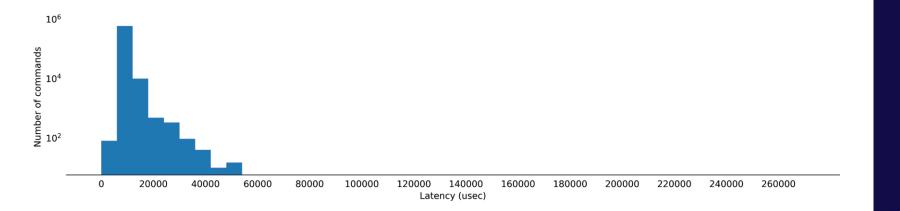





	Legacy stack wi	Phalanx with Ultrastar HC620	
	28,4	16,924	99%
87 I	97,3	26,211	99.95%
227	202,2	41,736	99.99%

## Benchmark systems configuration



Host-Managed SMR HDD Test System CMR HDD Test System

Benchmark application (e.g. fio/Hadoop/Ceph)

Benchmark application (e.g. fio/Hadoop/Ceph)

Kalista IO Phalanx storage system

XFS/ext4

Linux 5.0.0-25-generic kernel

Linux 5.0.0-25-generic kernel

Western Digital Ultrastar DC HC620 Host-Managed SMR HDD Western Digital
Ultrastar DC HC530
CMR HDD

## Benchmark results

SD@

6x

more IOPS with fio random write<sup>[5]</sup>

58%

higher IOPS with Ceph Rados write bench<sup>[7]</sup>

19%

faster throughput with Hadoop TestDFSIO read<sup>[6]</sup>

better performanceconsistency with Ceph Rados write bench<sup>[7]</sup>




# Thank you!

## Contact

@kalista.io

"There is nothing impossible to him who will try." — Alexander

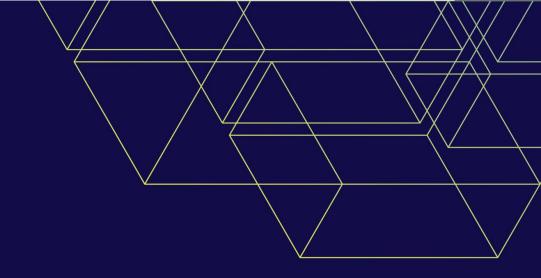

- 1. D. Reinsel and J. Rydning, "Worldwide Global DataSphere Forecast, 2019-2023: Consumer Dependence on the Enterprise Widening," IDC, 2019.
- 2. Source: Seagate Technology LLC and Western Digital Corp quarterly reports
- 3. Testing conducted by Kalista IO in July 2020 using XFS file system with Linux kernel 5.4.0-42-generic, and Intel® Core™ i7-4771 CPU 3.50GHz with 16GiB DDR3 Synchronous 2400 MHz RAM, and Western Digital Ultrastar DC HC530 CMR drive connected through SATA 3.2, 6.0 Gb/s interface. Write bench created a single 1GB file and executed 600,000 write commands each overwriting the first 64KB region of the file to capture latency values.
- 4. Testing conducted by Kalista IO in July 2020 using preproduction Olympus (Phalanx) software with Linux kernel 5.4.0-42-generic, and Intel® Core™ i7-4771 CPU 3.50GHz with 16GiB DDR3 Synchronous 2400 MHz RAM, and Western Digital Ultrastar DC HC620 host managed SMR drives connected through SATA 3.2, 6.0 Gb/s interface. Write bench created a single 1GB file and executed 600,000 write commands each overwriting the first 64KB region of the file capture latency values.

- 5. Testing conducted by Kalista IO in August 2019 using preproduction Phalanx software with Linux kernel 4.18.0-25-generic, and Intel Core i7-4771 CPU 3.50GHz with 16GiB DDR3 Synchronous 2400 MHz RAM, and Western Digital Ultrastar DC HC620 host managed SMR and Ultrastar DC HC530 CMR drives connected through SATA 3.2, 6.0 Gb/s interface. Tested with Flexible I/O tester (fio) version 3.14-11-g308a. Random write bench ran for 1800 seconds with 4KB block and 200GB file size, 64 concurrent threads each with queue depth of 1. Executed 3 times to capture average and standard deviation IOPS values.
- 6. Testing conducted by Kalista IO in August 2019 using preproduction Phalanx software with Linux kernel 5.0.0-25-generic, and Intel® Core™ i7-4771 CPU 3.50GHz with 16GiB DDR3 Synchronous 2400 MHz RAM, and Western Digital Ultrastar DC HC620 host managed SMR and Ultrastar DC HC530 CMR drives connected through SATA 3.2, 6.0 Gb/s interface. Tested with Apache Hadoop version 3.2.0 in single node pseudodistributed mode with single block replica, and TestDFSIO version 1.8 on OpenJDK version 1.8.0\_222. TestDFSIO read benchmark ran with 32 files, 16GB each for a 512GB dataset. Executed 3 times to capture average and standard deviation throughput values.

7. Testing conducted by Kalista IO in August 2019 using preproduction Phalanx software with Linux kernel 5.0.0-25-generic, and Intel Core i7-4771 CPU 3.50GHz with 16GiB DDR3 Synchronous 2400 MHz RAM, and Western Digital Ultrastar DC HC620 host managed SMR and Ultrastar DC HC530 CMR drives connected through SATA 3.2, 6.0 Gb/s interface. Tested with Ceph version 13.2.6 Mimic in single node mode with single object replica. Rados write bench ran with 4MB object and block (op) size with 16 concurrent operations for 1800 seconds to capture average and standard deviation IOPS values.



## Additional information


- 1. Western Digital Ultrastar DC HC600 SMR Series HDD https://www.westerndigital.com/products/data-center-drives/ultrastar-dc-hc600-series-hdd
- KALISTA IO and Western Digital joint solution brief:
   Distributed Storage System with Host-Managed SMR HDDs
   https://www.kalista.io/resources/joint-solution-briefs/KalistaIO-WDC-Joint-Solution-Brief.pdf
- 3. Addressing Shingled Magnetic Recording drives with Linear Tape File System https://www.snia.org/sites/default/files/files2/files2/SDC2013/presentations/Hardware/AlbertChenMalina\_Addressing\_Shingled\_Magnetic\_Recording.pdf
- 4. Host Managed SMR https://www.snia.org/sites/default/files/SDC15\_presentations/smr/AlbertChen\_JimMalina\_H ost\_Managed\_SMR\_revision5.pdf

## Additional information

- Linux SCSI Generic (sg) driver http://sg.danny.cz/sg/index.html
- 6. libzbc https://github.com/hgst/libzbc
- 7. dm-zoned
  https://www.kernel.org/doc/html/latest/admin-guide/device-mapper/dm-zoned.html
- 8. Flash-Friendly File System (F2FS)
  https://www.kernel.org/doc/Documentation/filesystems/f2fs.txt
- Zoned storage https://zonedstorage.io
- 10. Linux kernel changes https://kernelnewbies.org/LinuxVersions

## Additional information

- 11. Another Layer of Indirection
  https://www.linkedin.com/pulse/another-layer-indirection-albert-chen/
- 12. The Digital Universe of Opportunities: Rich Data and the Increasing Value of the Internet of Things, IDC, April 2014
- 13. Phalanx Flexible I/O tester (fio) benchmarks https://www.kalista.io/resources/performance/phalanx-fio-benchmarks.pdf
- 14. Phalanx Hadoop TestDFSIO benchmarks
  https://www.kalista.io/resources/performance/phalanx-hadoop-benchmarks.pdf
- 15. Phalanx Ceph OSD and Rados benchmarks
  https://www.kalista.io/resources/performance/phalanx-ceph-benchmarks.pdf

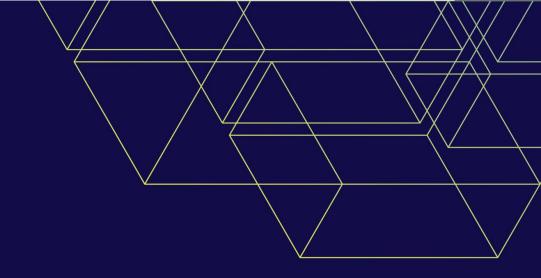


## **Attributions**

## **Attributions**

SD@

1. Icons from Font Awesome. License available at https://fontawesome.com/license No modifications made.

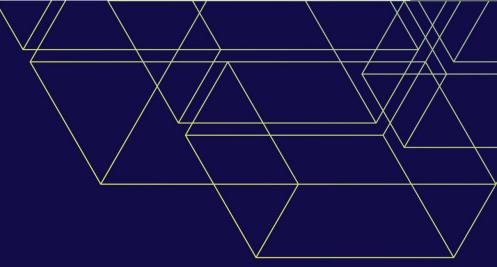

## Please take a moment to rate this session.

Your feedback matters to us.